


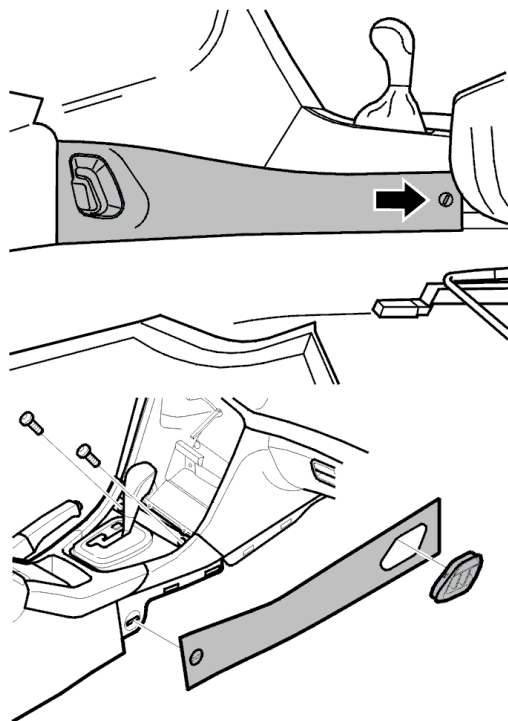

Replacing the side panel

- Remove the soundproofing panel
- Move the front seat to the rearmost position
- Turn the clips a 1/4 turn.

Hint: Use a washer or a coin.

- Slide the panel backwards
- Remove the panel.

- Unsnap the nozzle.

Install:

In reverse order.