


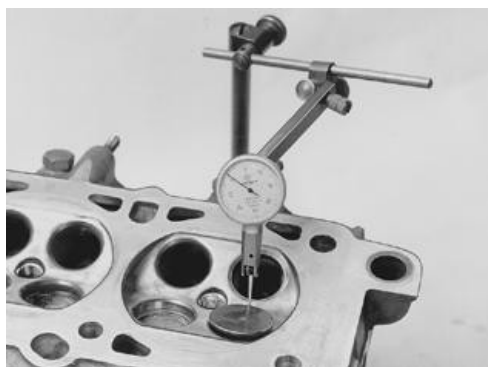

Valve guides

Clearance between new components	
Inlet and exhaust.....	0.03-0.06 mm

Maximum play for used components	
Inlet and exhaust.....	0.15 mm