

Panel, Tailgate, Replacing

Panel, [tailgate](#), replacing


As the illustrations in this service information are used for different model years and/or models, some variation may occur. However, the essential information in the illustrations is always correct.

Included in this method are methods for:

- the upper [tailgate](#) panel.
- the lower [tailgate](#) panel.

Panel [tailgate](#) upper, replacing

Removing the upper [tailgate](#) panel

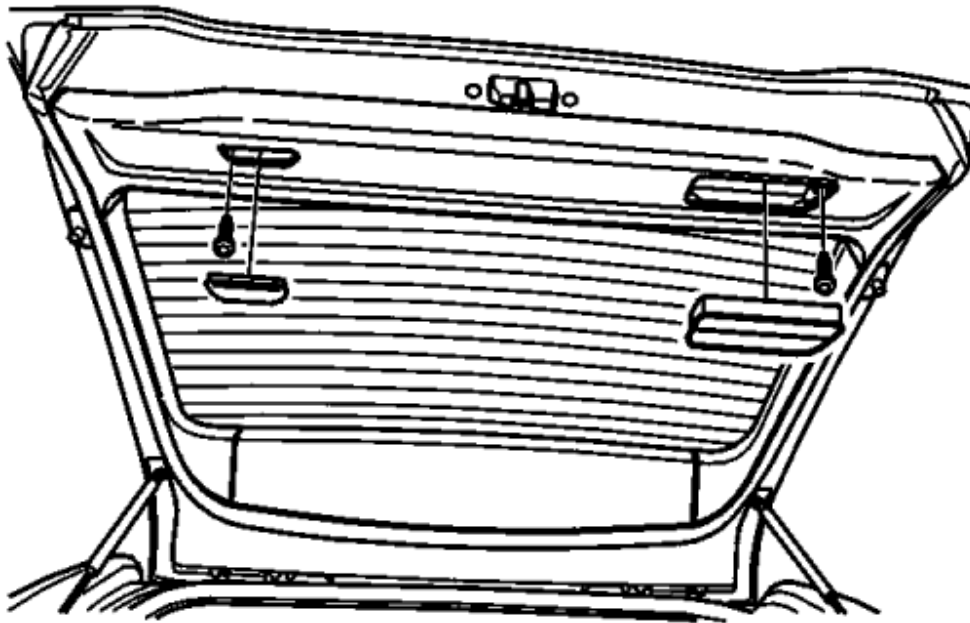

Remove:

- the [frame](#) around the opening handle
- the lamp
- the 2 screws.

Pull off the panel.

Installing the upper [tailgate](#) panel

Pull the cable harness through the panel.
Align and press the panel into place.

Install:

- the 2 M5 screws. Tighten
- the lamp
- the [frame](#) around the opening handle.