


Lower tailgate panel

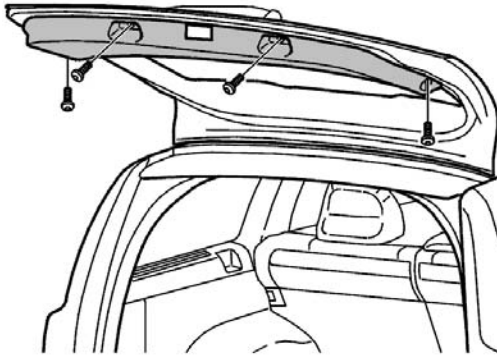

Removing the rear door panel

- Remove 2 screws on each side
- Begin by detaching the panel at the window (eight covered clips in total).

Note! When removing, note the position of the screws (the screws are two different lengths).

Installing the rear door panel

Install:

In reverse order.

Note! Ensure that the guide pins are correctly position before pushing the panel into place.

Note! Ensure that the clips click when they are pressed into place.