

TRANSMISSION SERVICING - A/T
Selected Block
1989 Volvo 240

NEUTRAL SAFETY SWITCH ADJ (240)

240 Series

1) Switch is located at the gear selector lever. Remove gear selector cover. Ensure "N" and "P" mark on indicator are directly opposite selector lever in the "N" and "P" positions respectively. If not, loosen 2 retaining bolts and readjust.

2) Ensure engine only starts in the "N" and "P" positions. Ensure back-up lights operate only in the "R" position. Ensure control pin does not slide out of switch lever. See Fig. 4.

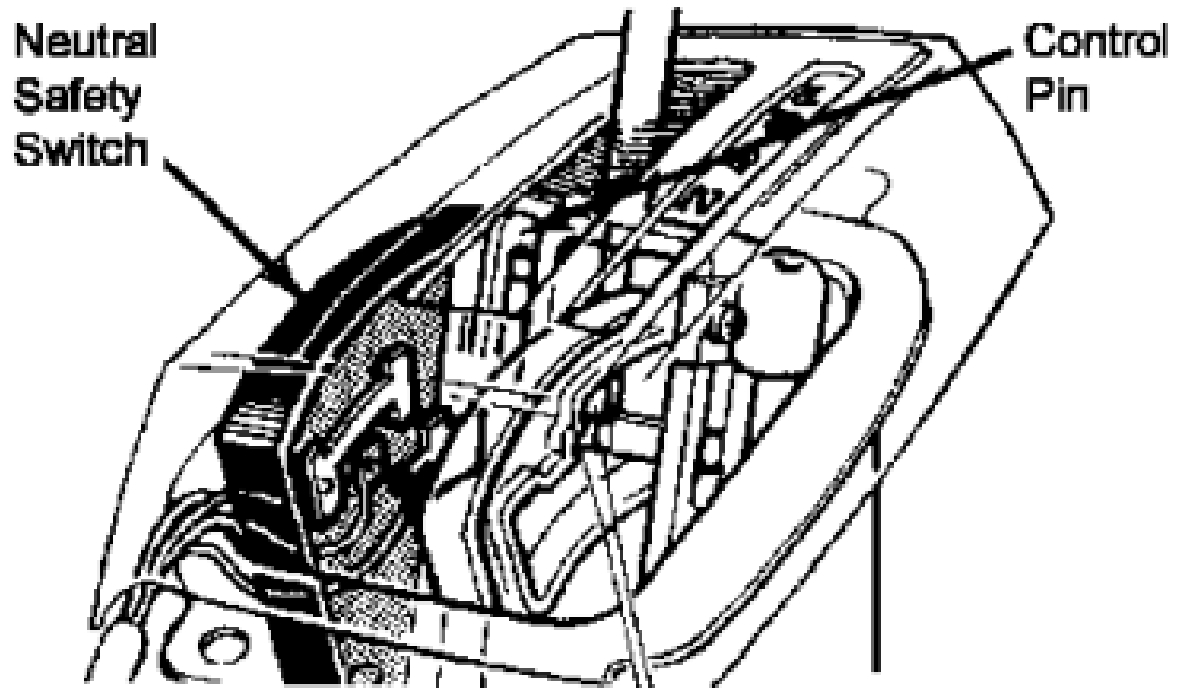


Fig. 4: Adjusting Neutral Safety Switch