

XC90, 2008, B6324S, TF-80SC AWD, YV4CZ982081451588, 451588

24/3/2015



PRINT

Parking brake, adjusting


Note! The illustrations in this service information are used for different model years and/or models. Some variation may occur. However, the essential information in the illustrations is always correct.

**Note! Previous version vehicles, with cables that have automatic adjustment of parking brake, should be modified as follows:
INFORMATION/
BULLETINS/ Parking brake, converting to manual adjustment
VCC-156045-1
Applies only to model year 2003, XC90**

Removal


Removing the panel

Remove the panel for the center console on the left-hand side. Locate the adjustment for the parking brake (1).

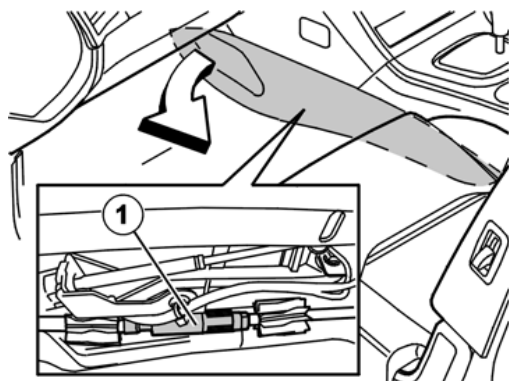


Remove the retaining clip.

Note! Take care when removing

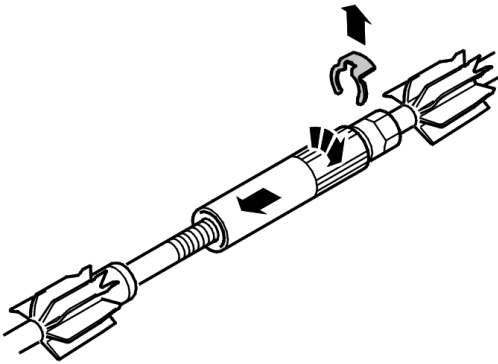

the retaining clip.

Screw the socket clockwise over the groove for the retaining clip. Press the socket back over the adjustment rod.

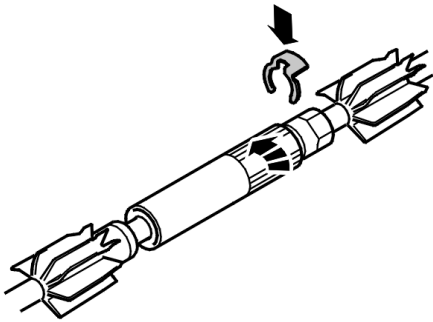


Screw the socket anticlockwise so that the groove for the clip emerges. Install the clip.

Adjusting the parking brake

Depress the brake pedal to the first notch. Press out the adjustment using the adjustment rod: 951 2947 .

Test the parking brake.

Full effect can be obtained between the second and fifth ratchet teeth.

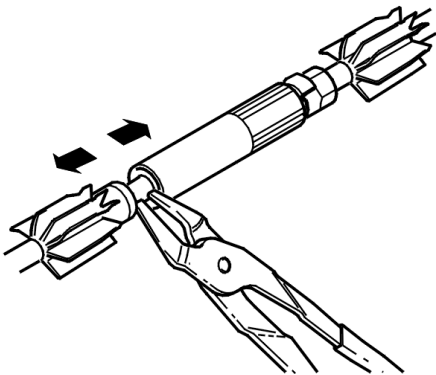

Installation

Installing the panel

Install the panel for the center console on the left-hand side.

PRINT

24/3/2015