


Idle speed control (ISC) actuator

Component connected

Terminals	Condition	Typical value	Note
1 & 2	Engine idling	2-12 V (fluctuating)	2

Notes

2. Checking signal.

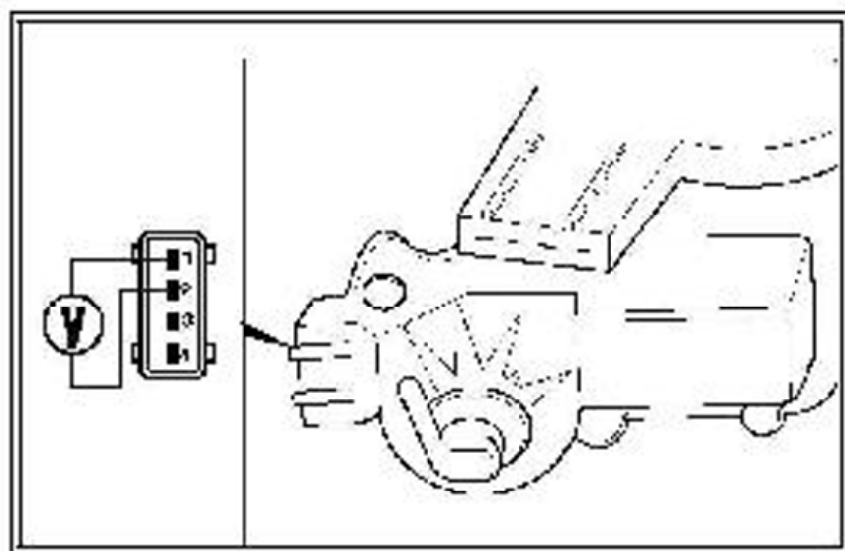

Knock sensor (KS)

Terminals	Condition	Typical value	Note
		17 Nm	2

Notes

2. Ensure cylinder block and KS mating faces are free from corrosion and clean.

