


Loudspeaker, D-post, replacing

Removing the loudspeaker in the D-post

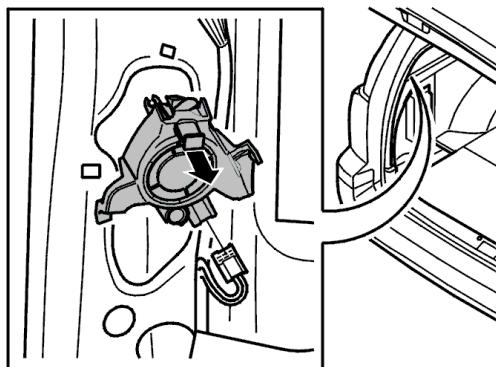

- Detach the loudspeaker grille by releasing it at the lower edge and pulling straight downwards
- Pull out the clips
- Angle out the loudspeaker. Disconnect the connector.

Installing the loudspeaker in the D-post

Install:

In reverse order.