
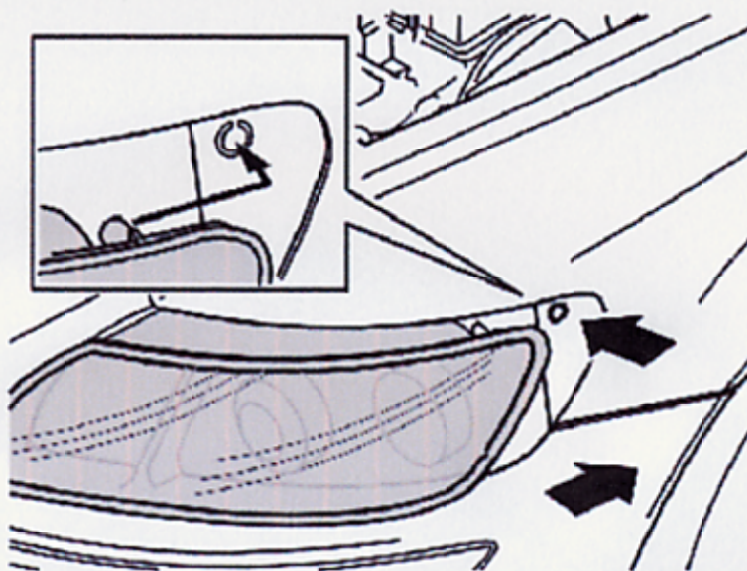


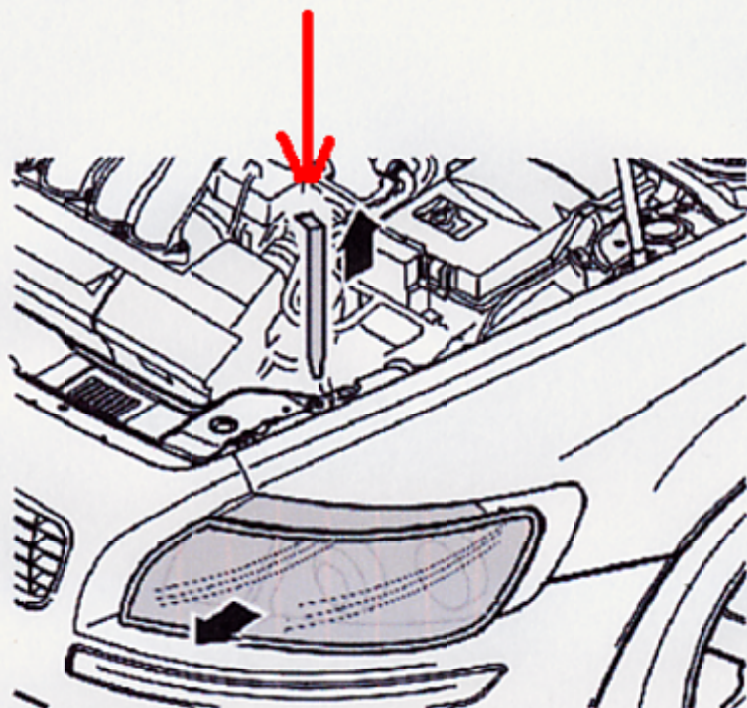

Caution! The plastic lens on the headlamp scratches easily. Do not place the headlamp on a hard surface with the lens downwards.

Caution! Do not damage the paintwork on the bumper when removing/installing the headlamp.

Removing headlamp

Note! For vehicles with Bi-Xenon lamps, see: [Bulb Bi-Xenon, replacing](#)

Remove:

- the locking plate
- the headlamp.

Installing the headlamp

Hint: Press the lamp straight back. Align the guides in position.

Install:

- the connector
- the headlamp
- the locking plate.