

Cigarette lighter assembly/electrical socket front, replacing

Note! The illustrations in this service information are used for different model years and/or models. Some variation may occur. However, the essential information in the illustrations is always correct.

Preparatory work


Disconnecting the battery lead

Move the gear selector to its rearmost position.

Ignition off.

Disconnect the battery negative lead. See:


[Note when disconnecting/connecting the battery lead](#) .

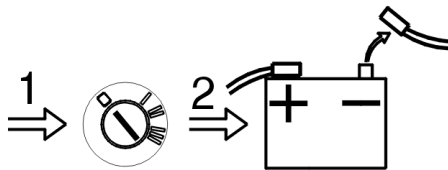

Removal

Removing the gear selector lever panel

Remove the gear selector lever panel, see illustration.

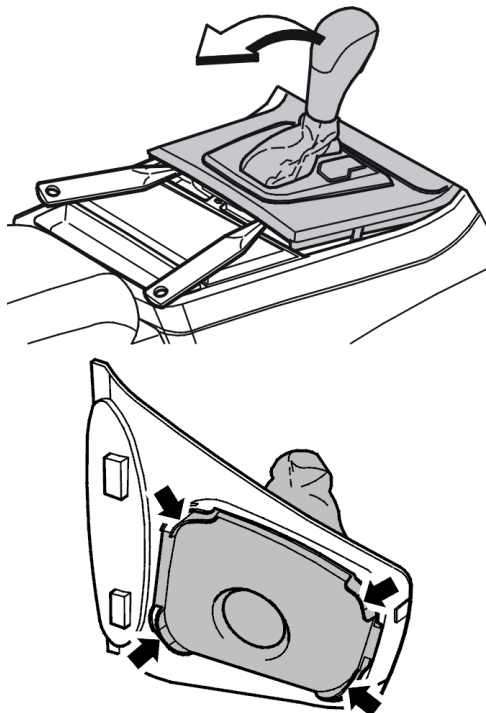


Remove the panel by pressing in the 4 catches.

Removing the dashboard environment panel


Caution! Do not damage the panel.

Remove:

- the 2 screws
- the dashboard environment panel by bending backward and downwards to the

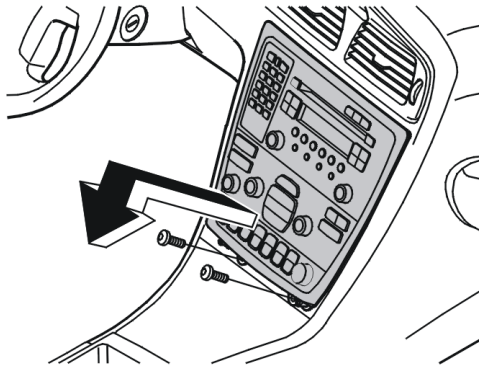

side
- the connectors.

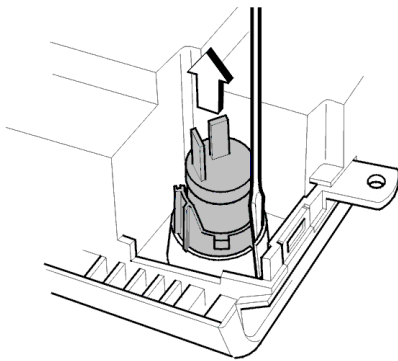

Removing the cigarette lighter assembly/electrical socket front

Remove the lighter sleeve by releasing the catches using a small screwdriver. Press out the lighter sleeve so that the catches release.

Installation

Installing the units

Install:

- the lighter sleeve
- the connectors
- the dashboard environment panel
- the 2 screws
- the panel for the gear selector lever.

Press the panel into place.

Finishing

Installing the battery lead

Connect the battery negative lead. See: [Note when disconnecting/connecting the battery lead](#).