


Blower fan motor / power unit, replacing

Preparations

Remove

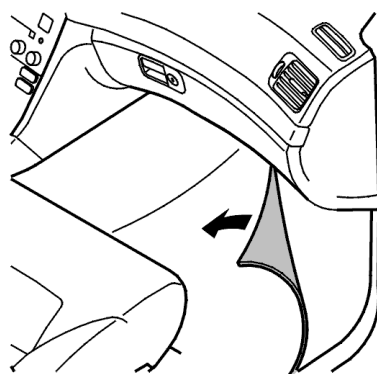


- the sill trim panel. See [The front sill trim panel](#)
- the soundproofing panel on the passenger side. See [Replacing the soundproofing panel](#)
- the side panel on the centre console. See [Centre console components](#)
- the glove compartment. See [Glove compartment, replacing](#)
- any mounting hooks for child seats.

Detach the drain hoses from the motor and the filter housing. Move to one side.

Detach the floor carpet at the front and fold it back.

Replacing blower fan motor


Removal

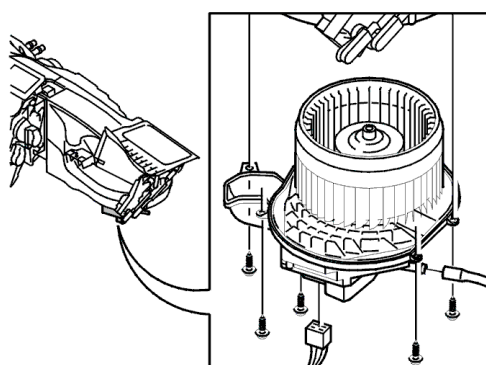

Disconnect the connector.

Remove the 5 screws from the blower fan motor.

Detach and remove the blower fan motor.

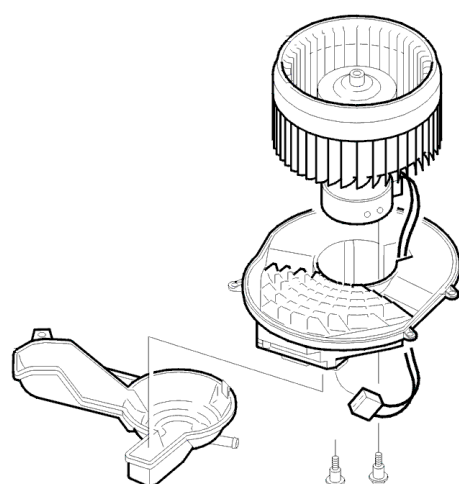

Disconnect the connector.

Detach the cover from the blower fan motor.


Remove the 2 screws from the top.

Press and pull out the blower fan motor and the fan wheel. Use a screwdriver for example.

Installation

Install in reverse order.

Replacing the power unit

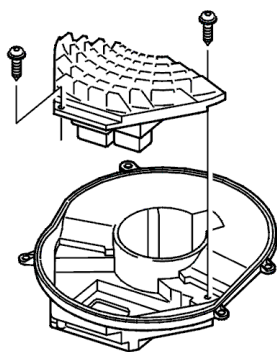

Removal


Remove the blower fan motor and the fan wheel. See [Preparations](#) and [Replacing blower fan motor](#)

Slacken off the 2 screws in the power unit.

Installation

Install in reverse order.

The front sill trim panel

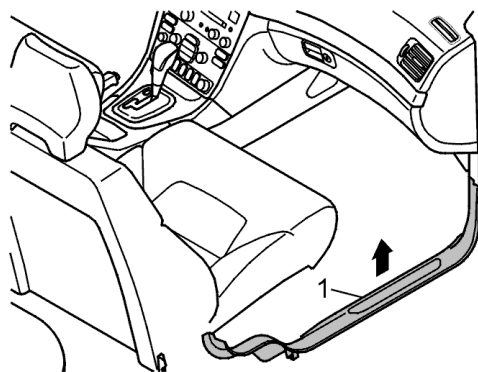

Pull the sill trim panel straight up.
Pull out the sill trim panel at the front and rear edges.

Install:

In reverse order.

Replacing the soundproofing panel

Replacing the driver's side soundproofing panel

As the illustrations in this service information are used for different model years and / or models, some variation may occur. However, the essential information in the illustrations is always correct.


Slacken off the 2 screws.

Remove the soundproofing panel by pulling it straight down.

Replace the soundproofing panel.

Install:

- the soundproofing panel
- the 2 screws. Tighten.

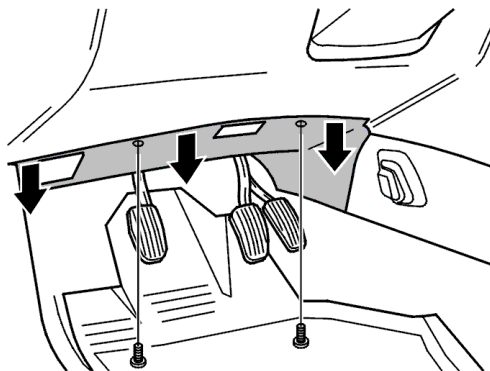

Replacing the passenger side soundproofing panel


Slacken off the 2 screws.

Remove the soundproofing panel by pulling it straight down.

Replace the soundproofing panel.


Install:

- the soundproofing panel
- the 2 screws. Tighten.

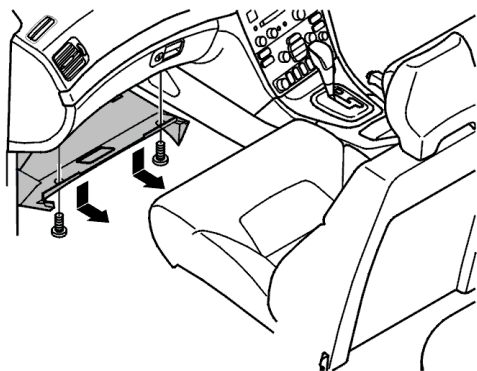


Centre console components

Coin tray / CD compartment

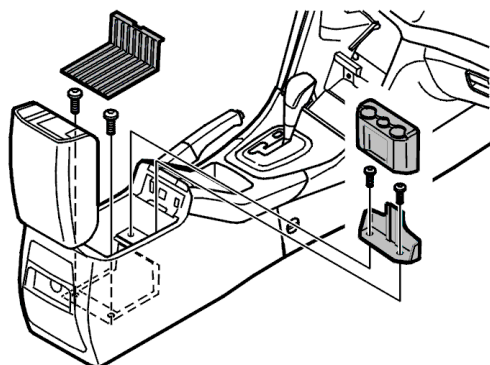

Open the cover for the centre console locker.
The coin tray rests on a plastic bracket:
Pull straight up.

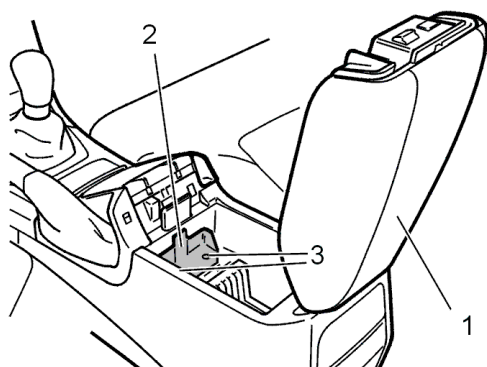


Remove the 2 screws holding the plastic bracket for the coin tray.
The CD rack is secured by a snap fastener at its front edge:
Pull straight up

Install:

In reverse order.

Parking brake panel

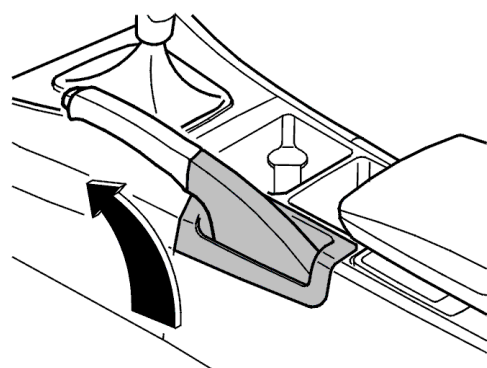


Release the catch at the rear edge.
Lift the panel.
Thread the boot over the parking brake lever.

Install:

In reverse order.


Gear selector panel

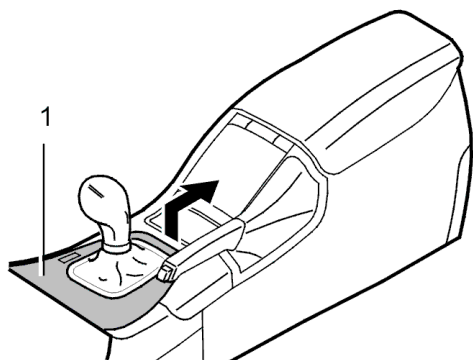


Move the gear selector to a rear position.
Lift the rear edge of the panel.
Fold and lift up the panel.

Release the catches on the underneath.
Press up the inner section of the panel.
Release the frame.

Install:

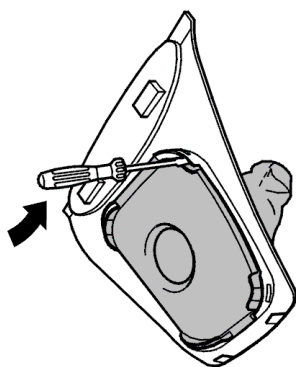


In reverse order.

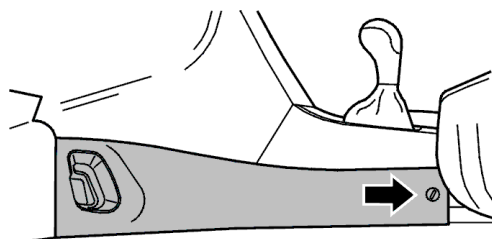

Side panel

Move the front seat to the rearmost position.
Turn the clips a 1/4 turn.
Slide the panel backwards.
Remove the panel.

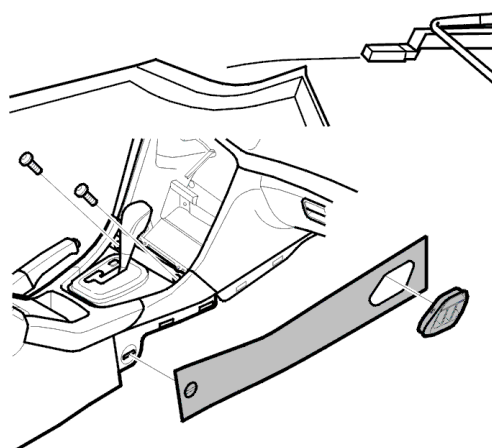

Unsnap the nozzle.

Install:

In reverse order.

Rear ashtray

Open the ashtray.
Press down slightly.
Remove the ashtray.
Release the catches on the side.
Pull the holder backwards.
Remove the connector.

Install:



In reverse order.

Handset holder

4-door body

Remove

- the rear ashtray according to [Rear ashtray](#) .
- the panel above the cigarette lighter:
Snap loose and fold forward.

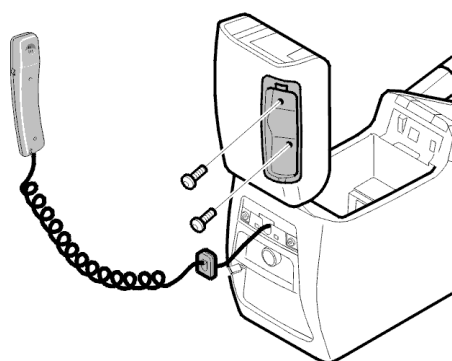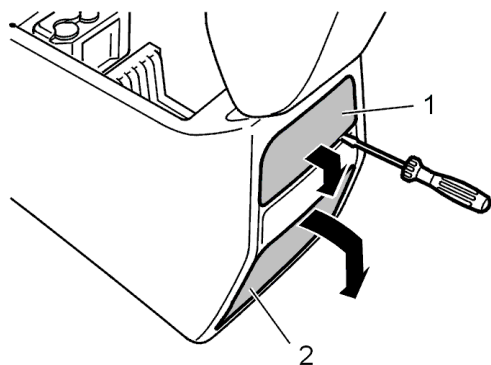

- the two screws for the inner panel
- the inner panel.
Release the catches.
Press upward.
Pull off the panel
- the cable lead-in and the cable from the panel
- the two screws for the handset holder
- the handset holder.

Install:

In reverse order.

5-door body

To access and replace the handset, see [Handset, replacing](#) .


The panel over the centre console locker

Remove:

- the parking brake panel according to [Parking brake panel](#)
- the gear selector panel according to [Gear selector panel](#) .
- the 5 screws.

Install:

In reverse order.

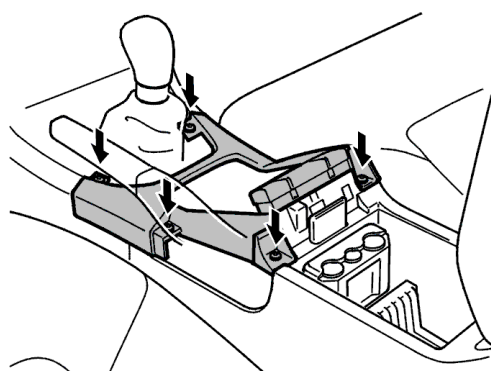

Glove compartment, replacing


Glove compartment, replacing

Remove the soundproofing panel on the passenger side. See [Replacing the soundproofing panel](#)

Open the glove compartment.

Slide the two hooks on each side past the tabs.

Remove the gas strut by pulling it straight out.

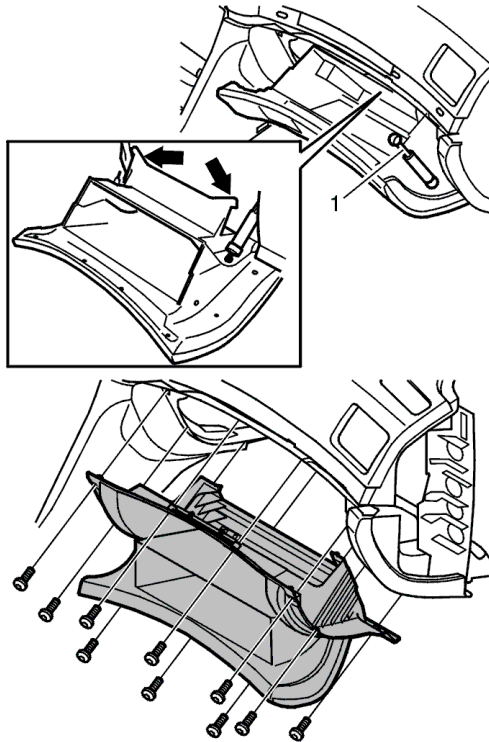

Remove:

- ten screws
- the connector for the glove compartment lighting
- the connector for the foot well lighting
- the glove compartment.

Install:

In reverse order.

Transfer those components that do not need to be replaced.