

Glass sun roof, replacement

Note! The illustrations in this service information are used for different model years and / or models. Some variation may occur. However, the essential information in the illustrations is always correct.

Preparations

Remove the apron moulding. See [Apron moulding sun roof, replacement](#).

Removing the sun roof glass

Remove:


- the screws, 2 on each side
- the glass sun roof.

Installing the glass sun roof

Caution! Check that the mechanism has not moved during the replacement.

Install:

- the glass sun roof
- the screws, 2 on each side.

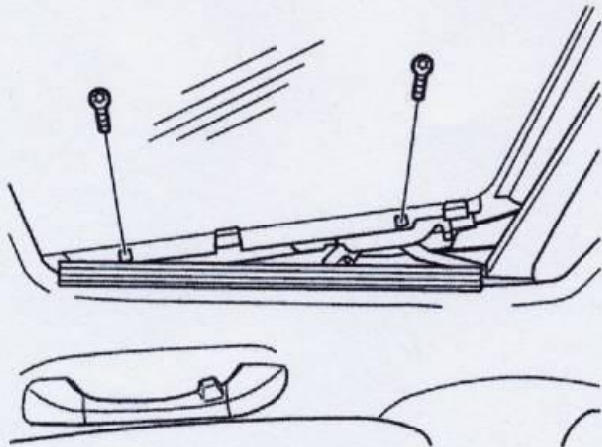

Apron moulding sun roof, replacement

Note! The illustrations in this service information are used for different model years and / or models. Some variation may occur. However, the essential information in the illustrations is always correct.

Removing the apron moulding for the sun roof

The sun roof must be in the half open position. Pull the apron moulding inwards into the car. Detach the upper edge of the apron moulding. Unhook the lower edge of the apron moulding. Remove the apron moulding.

Installing apron moulding for the sun roof

Hook the apron moulding into place at the top and bottom edges.

