

884: Seat belt and other restraining systems

XC70 (08-), 2014, B6304T4, TF-80SC AWD, L.H.D

4/12/2024



PRINT

884: Seat belt and other restraining systems**Operation number:**

85244-2

**Collision
protection unit
from behind front
seat**


**Note! Some
variation in the
illustrations may
occur, but the
essential
information is
always correct.**

Removal

**Note! Removal
steps in this
procedure may
contain installation
details.**


**Only for vehicles
with fixed backrest.**

Remove the front seat
according to: Front
seat .

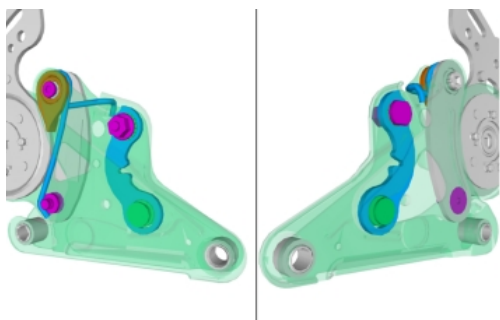


**Caution! The operation must be
carried out on both sides of the
seat.**

Note! On both sides.

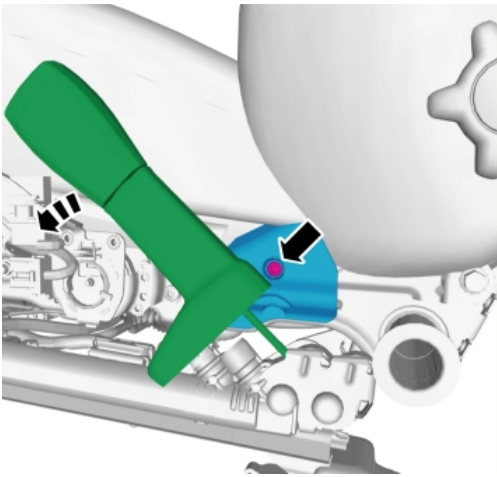


Note! On both sides.

Torque: Backrest cushion to seat cushion , 45 Nm

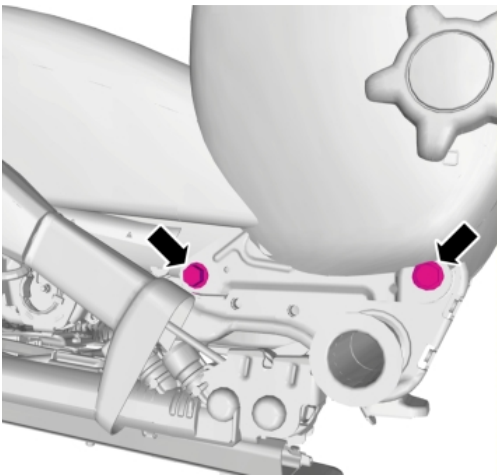


Loosen and move
aside the backrest
upholstery acc. to:
Front seat backrest .

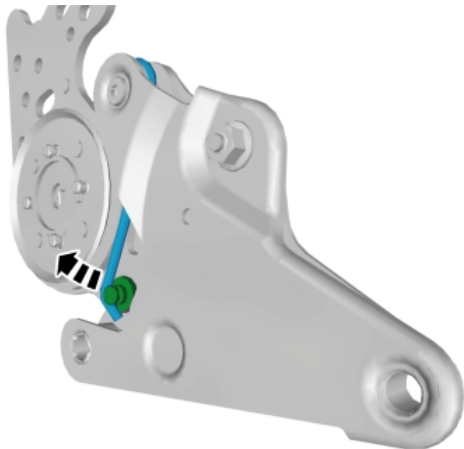



Warning! Take extra care when
handling the compressed
spring.



Torque: Fitting bolt, hinge, 18
Nm

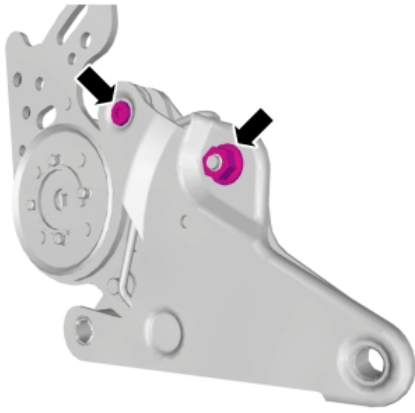

•
Torque: Hinge bracket to
backrest, 9 Nm
•

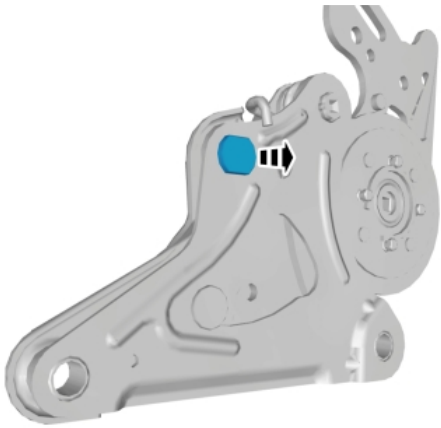


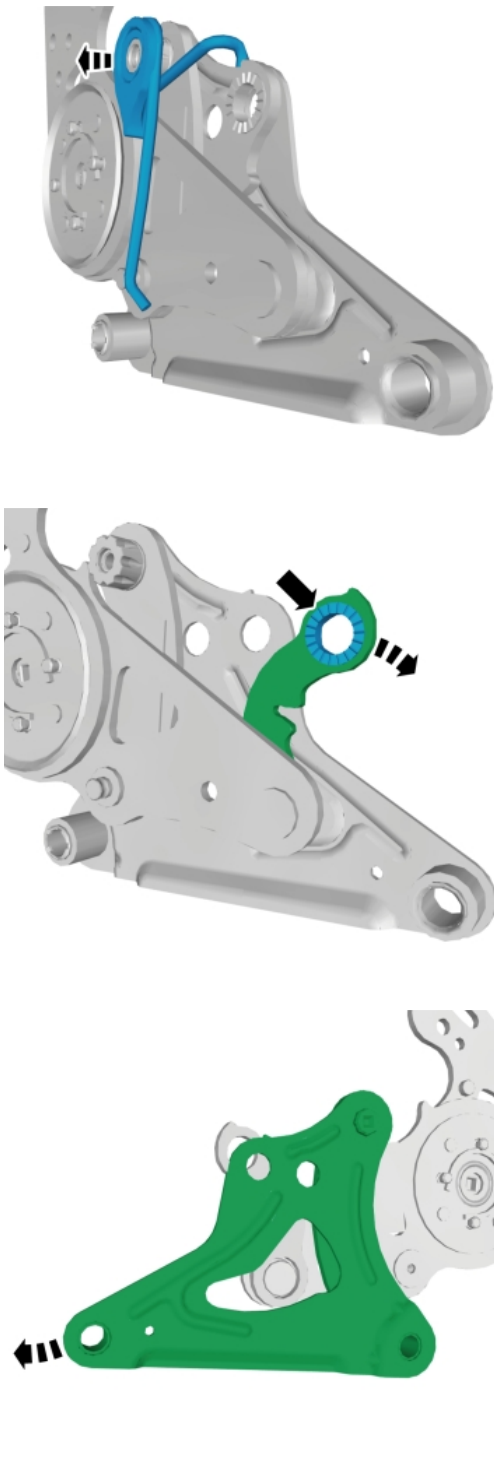

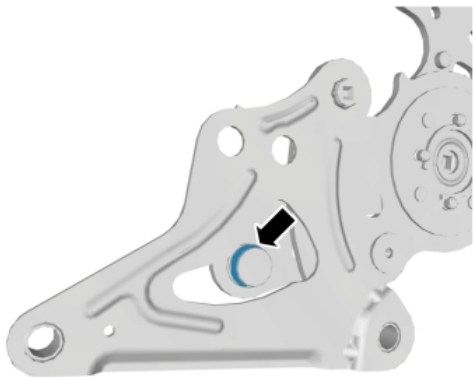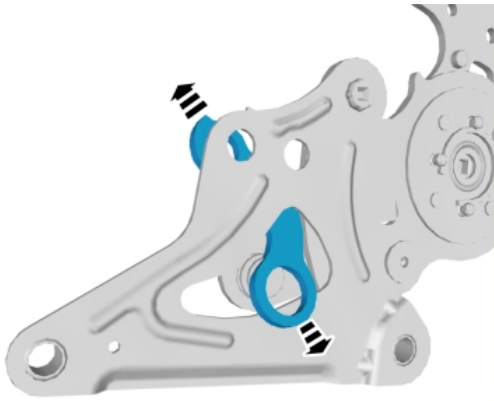


**Only for vehicles
with folding
backrest.**


Remove the front seat
according to: Front
seat .

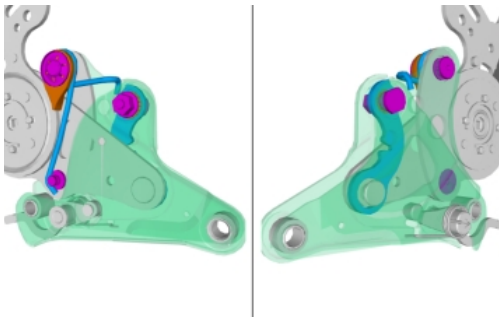

Caution! The operation must be
carried out on both sides of the
seat.

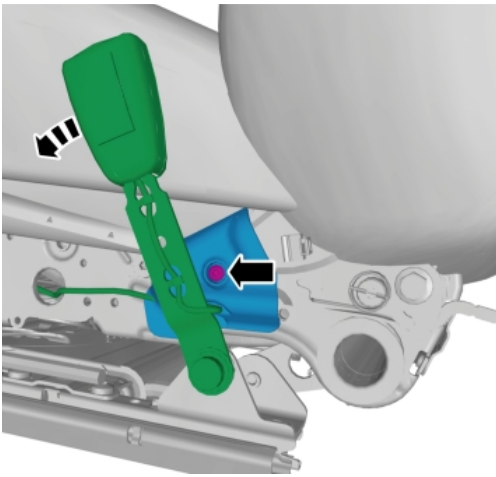

Note! On both sides.

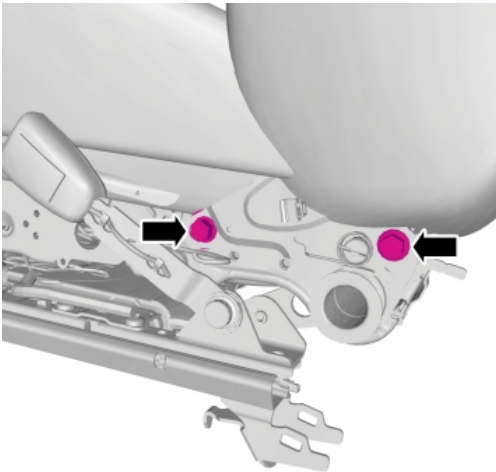


Note! On both sides.

Torque: Backrest cushion to seat cushion , 45 Nm




.



Loosen and move
aside the backrest
upholstery acc. to:
Front seat backrest .

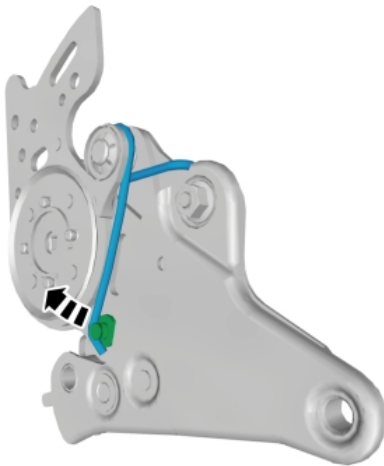

Warning! Take extra care when
handling the compressed
spring.

Torque: Fitting bolt, hinge, 18
Nm

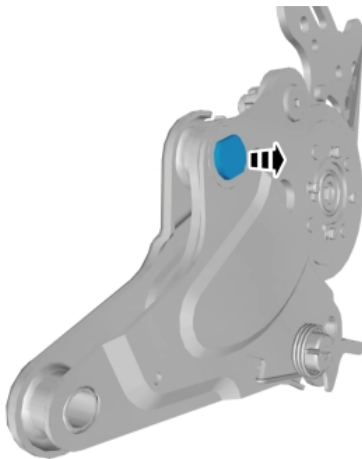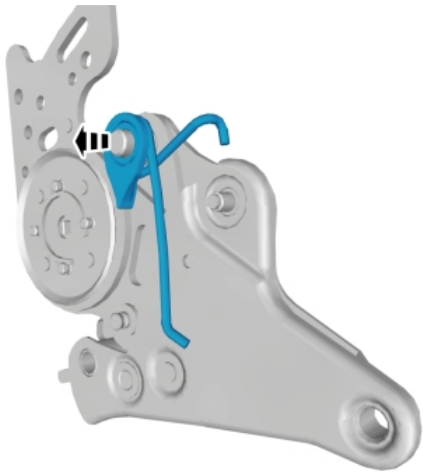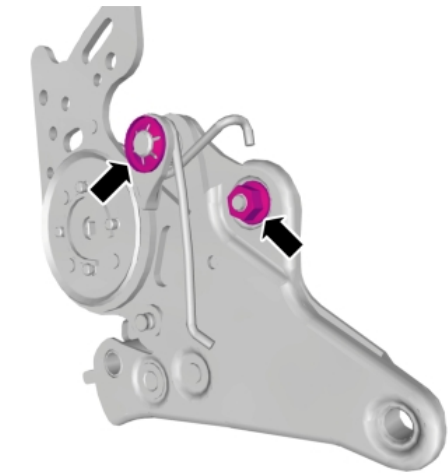

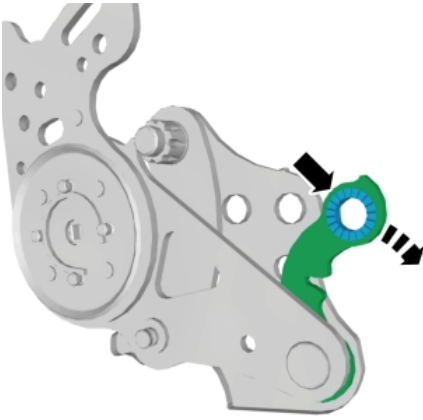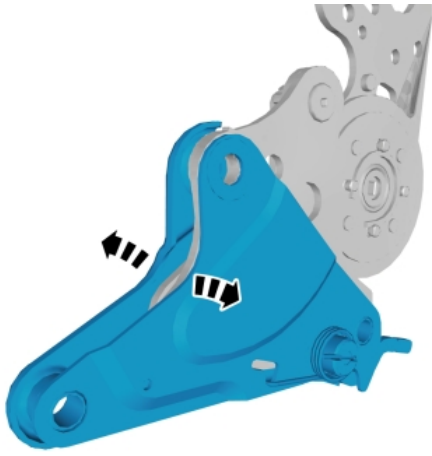



Installation

To install, reverse the removal procedure

4/12/2024

PRINT